


Intrada SEC

250 x 4.6 mm

HPLC COLUMN APPLICATION

Arabinogalactan from Larch Wood

アラビノガラクトン (カラマツ材由来)

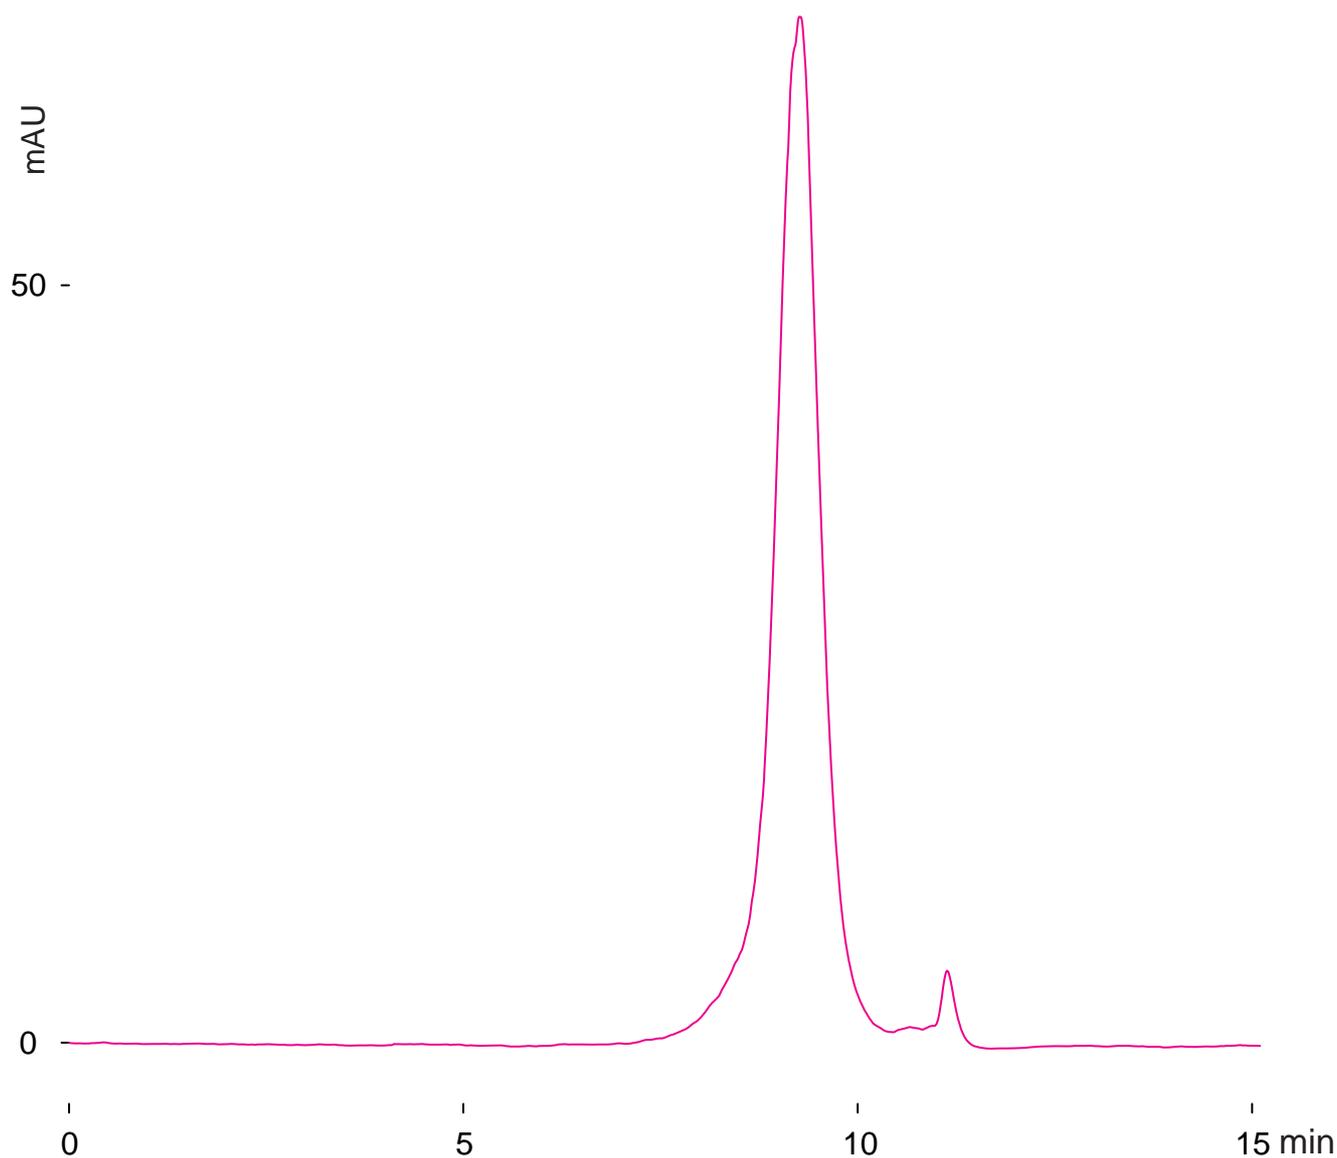

*Intrada SEC, 250 x 4.6 mm
100mM ammonium formate
0.3mL/min (6MPa), 37°C
ELSD (spray chamber 70°C, drift chamber 100°C)
10µL (10µg/mL, water)*